## **Enphase Q Cable and Accessories**

The **Enphase Q Cable™** and accessories are part of the sixth generation Enphase IQ System™. These products provide simplicity, reliability, and faster installation times.



## Enphase Q Cable

- Two-wire, double-insulated Enphase Q Cable is 50% lighter than the previous generation Enphase cable
- New cable numbering and plug and play connectors speed up installation and simplify wire management
- · Link connectors eliminate cable waste



## Field-Wireable Connectors

- Easily connect Q cables on the roof without complex wiring
- Make connections from any open connector and center feed any section of cable within branch limits
- · Available in male and female connector types




## **Enphase Q Cable Accessories**

Replacement DC Adaptor (MC4)

Replacement DC Adaptor (UTX)

Q CABLE SPECIFICATIONS				
Voltage rating	600V (connector rating 250 V)			
Cable temperature rating	90° C wet/dry			
UV exposure rating	EN ISO 492-2			
Environmental protection rating	IEC 60529 IP67			
Compliance	RoHS, OIL RES I, CE, UV resistant			
Cable insulator rating	H07BQ-F			
Flame rating	IEC 60332-1-2			
Q CABLE TYPES / ORDERING OPTIONS				
Model Number	Max Nominal Voltage	Connector Spacing	PV Module Orientation	Connector Count per Box
Q-25-10-240	250 VAC	1.3 m	Portrait	240
Q-25-17-240	250 VAC	2.0 m	Landscape (60-cell)	240
Q-25-20-200	250 VAC	2.3 m	Landscape (72-cell)	200
ENPHASE Q CABLE ACCESSORIES				
Name	Model Number	Description		
Raw Q Cable (unconnectorised)	Q-25-RAW-300	300 meters cable with no connectors		
Field-wireable connector (male)	Q-CONN-R-10M	Make connections		
Field-wireable connector (female)	Q-CONN-R-10F	Make connections from any Q Cable open connector		
Cable Clip	ET-CLIP-100	Used to fasten cabling to the racking or to secure looped cabling		
Disconnect tool	Q-DISC-10	Disconnect tool for Q Cable connectors, DC connectors, and AC module mount		
Q Cable sealing caps (female)	Q-SEAL-10	One needed to cover each unused connector on the cabling		
Terminator	Q-TERM-R-10	Terminator cap for unused cable ends		

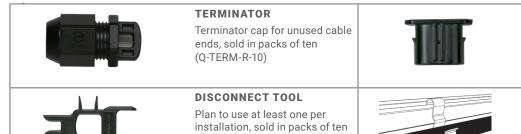

(Q-DISC-10)

Q-DCC-2-INT

Q-DCC-5-INT



Sealing caps for unused cable connections, sold in packs of ten (Q-SEAL-10)



Used to fasten cabling to the racking or to secure looped cabling, sold in packs of ten (ET-CLIP-100)



DC adaptor to MC4 (max voltage 100 VDC)

DC adaptor to UTX (max voltage 100 VDC)